




10" Ceramic Subwoofer

Program Power	200+200 W
Rated impedance	8+8 Ohm
Nominal diameter	10" - 250 mm
Sensitivity (2,83V/1m)	89 dB
Voice coil diameter	2 in - 50 mm
Frequency Range	25-600 Hz

SPECIFICATIONS

Nominal Diameter	10" - 250 mm
Rated Impedance	8+8 Ohm
Nominal Power Handling ¹	100+100 W
Program Power ²	200+200 W
Sensitivity ³	89 dB
Frequency Range ⁴	25-600 Hz
Minimum Impedance	-
Basket Material	Aluminum
Magnet Material	Ferrite
Cone Material	Treated Cellulose
Cone Shape	-
Surround	Rubber
Suspension	-
Voice Coil Diameter	2 in - 50 mm
Voice Coil Winding Material	-
Voice Coil Length	24 mm - 0,94 in
Voice Coil Former Material	Kapton
Connection type	-
Ferrofluid	No
Magnetic Gap Height	8 mm - 0,31 in
Max. Peak to Peak Excursion	-
Efficiency Bandwidth Product EBP	70
Recommended Loading	Vented Box
Volume / Tuning frequency	62 Lt (dm ³) - 2,19 cuft / 30 Hz
Maximum recommended frequency	-

FREQUENCY RESPONSE AND IMPEDANCE CURVE ^{6 7}

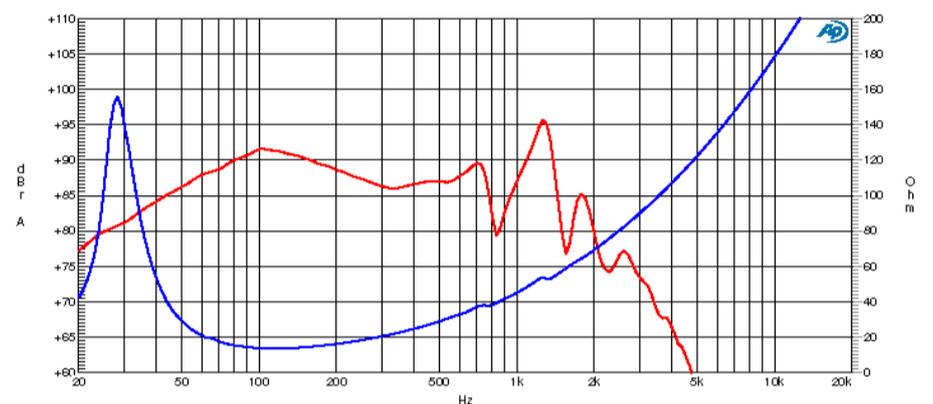


T/S PARAMETERS

8+8 Ohm

* Parameters measured with voice coils connected in series

Resonance frequency	Fs	30 Hz
DC Resistance	Re	5,8+5,8 Ohm
Mechanical Q Factor	Qms	7,21
Electrical Q Factor	Qes	0,43
Total Q Factor	Qts	0,4
BI Factor	Bl	19,91 Tm
Effective Moving Mass	Mms	79,13 g
Equivalent Gas air loaded	Vas	63,2 lt (dm ³) - 2,23 cuft
Suspension Compliance	Cms	0,38 mm/N
Effective Piston Diameter	D	210 mm - 8,27 in
Effective piston area	Sd	346 cm ² - 53,63 sq in
Max. Linear Excursion ⁵	Xmax	10 mm - 0,39 in
Voice Coil Inductance @ 1kHz	Le	4,03 mH
Half-space Efficiency	η_0	0,36 %



MOUNTING AND SHIPPING INFORMATION

Overall Diameter	267,5 mm - 10,53 in
Baffle Cutout Diameter	235 mm - 9,25 in
Flange and Gasket Thickness	5 mm - 0,2 in
Total Depth	127 mm - 5 in
Bolt Circle Diameter	253 mm - 9,96 in
Bolt Holes Quantity and Diameter	8 / 5 mm - 0,2 in
Net Weight	4,2 Kg - 9,25 lb
Shipping Units	6 Pcs

NOTES

¹ Nominal power is determined according to AES2-1984 (r2003) standard.

² Program Power is defined as 3 dB greater than the Nominal rating.

³ Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.

⁴ Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.

⁵ Linear Math. Xmax is calculated as $(Hvc-Hg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gapdepth.

⁶ Frequency response curve is measured on infinite baffle conditions.

⁷ Impedance curve is measured in free air conditions at small signals.