

KR AUDIO ELECTRONICS HI VACUUM TUBE

KR 842 VHD

General data

Filament specifications: DC/AC Voltage 5 V
DC/AC Current 1.8 A

Amplification Factor 3,7


Power Amplifier class A1

Maximum

DC Plate Voltage 600 V
Dissipation 65 W
DC Plate Current 150 mA

DC Plate Voltage 450 V
DC Plate Current 100 mA
Grid Voltage -94 V
Plate Resistance 650 ohm
Transconductance 5,7 mA/V

CONNECTION OF THE VALVE BASE KR 842 VHD

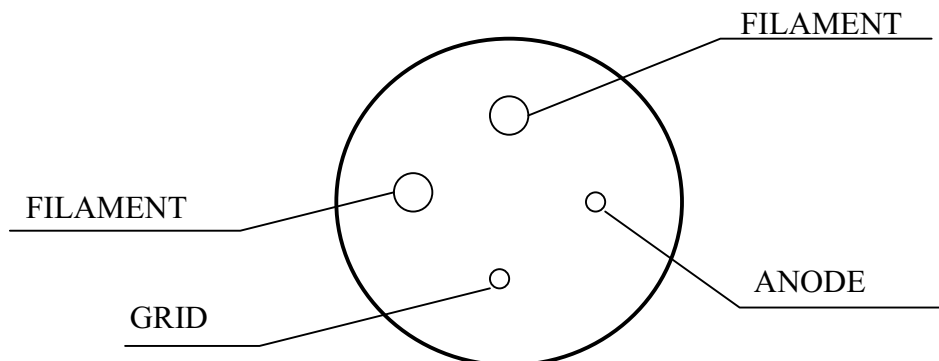

VIEW FROM BELOW

KR AUDIO USA, Harwil Group
Exclusive USA Distributor
8390 E. Via De Ventura
F110-194
Scottsdale, Arizona 85258
1-888-593-8488 x121
www.kraudiousa.com

Plate characteristics KR 842 VHD

