

# 10MB600

## High Output MB Ferrite Transducer

- 98 dB SPL 1W / 1m average sensitivity
- 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
- 450 W AES power handling
- Weather protected cone and plates for outdoor usage
- Excellent transient response
- Improved heat dissipation via unique basket design
- Ideal for compact two way and multiway systems



### GENERAL SPECIFICATIONS

Nominal Diameter	260 mm (10 in)
Rated Impedance	8 Ohm
AES Power (1)	450 W
Program Power (2)	700 W
Peak Power	1500 W
Sensitivity (3)	98 dB
Frequency Range (4)	55 - 4500 Hz
Power Compression @-10dB	0,4 dB
Power Compression @-3dB	1,6 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	2500 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0,9 - 1,41 cuft)
Max Recomm. Frequency	2500 Hz
Max Peak To Peak Excursion	24 mm (0,94 in)


### THIELE SMALL PARAMETERS (5)

Fs	58 Hz
Re	5,7 Ohm
Sd	0,035 sq.mt. (54,25 sq.in.)
Qms	5,5
Qes	0,23
Qts	0,22
Vas	33,4 lt. (1,18 cuft)
Mms	38 gr. (0,08 lb)
BL	18,6 Tm
Linear Mathematical Xmax (6)	± 6,5 mm (± 0,26 in)
le (1kHz)	1,6 mH
Ref. Efficiency 1W@1m (half space)	96,5 dB

### MOUNTING INFORMATION


Overall diameter	260 mm (10,24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	244,5 mm (9,63 in)
Front mount baffle cutout Ø	232 mm (9,13 in)
Rear mount baffle cutout Ø	232 mm (9,13 in)
Total depth	127 mm (5 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	7,35 kg (16,23 lb)
Shipping weight	7,9 kg (17,44 lb)

### FREQUENCY RESPONSE CURVE

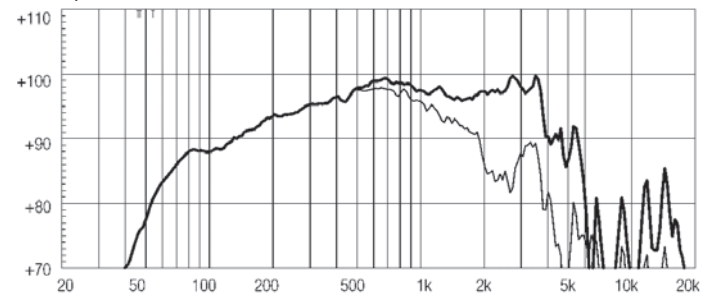

FREQUENCY RESPONSE CURVE OF 10MB600 MADE ON 30 LIT. ENCLOSURE TUNED AT 55HZ IN FREE FIELD (4P) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

### FREE AIR IMPEDANCE MAGNITUDE CURVE

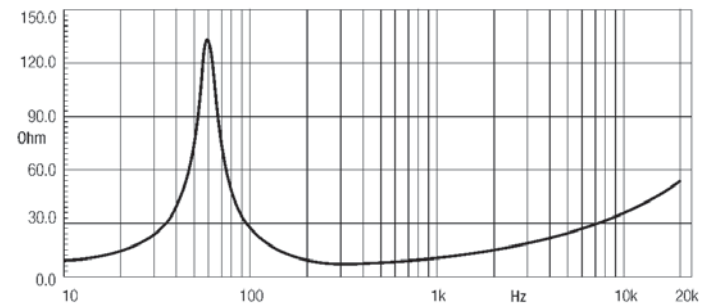

FREE AIR IMPEDANCE MAGNITUDE CURVE

### NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 30 lit enclosure tuned 55Hz using a 70 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as  $(HvcHg)/2 + Hg/4$  where Hvc is the coil depth and Hg is the gap depth.