





4" Ceramic Extended Range

Program Power	120 W
Rated impedance	16 Ohm
Nominal diameter	4" - 100 mm
Sensitivity (2,83V/1m)	88,5 dB
Voice coil diameter	1 in - 25 mm
Frequency Range	150-20000 Hz

SPECIFICATIONS

Nominal Diameter	4" - 100 mm
Rated Impedance	16 Ohm
Nominal Power Handling ¹	60 W
Program Power ²	120 W
Sensitivity ³	88,5 dB
Frequency Range ⁴	150-20000 Hz
Minimum Impedance	-
Basket Material	Steel
Magnet Material	Ferrite
Cone Material	Treated Cellulose
Cone Shape	-
Surround	Nomex Fabric
Suspension	-
Voice Coil Diameter	1 in - 25 mm
Voice Coil Winding Material	-
Voice Coil Length	8,5 mm - 0,33 in
Voice Coil Former Material	-
Connection type	-
Ferrofluid	No
Magnetic Gap Height	5 mm - 0,2 in
Max. Peak to Peak Excursion	-
Efficiency Bandwidth Product EBP	149
Recommended Loading	Sealed box
Volume / Tuning frequency	2 Lt (dm ³) - 0,071 cuft
Maximum recommended frequency	-

FREQUENCY RESPONSE AND IMPEDANCE CURVE ^{6 7}

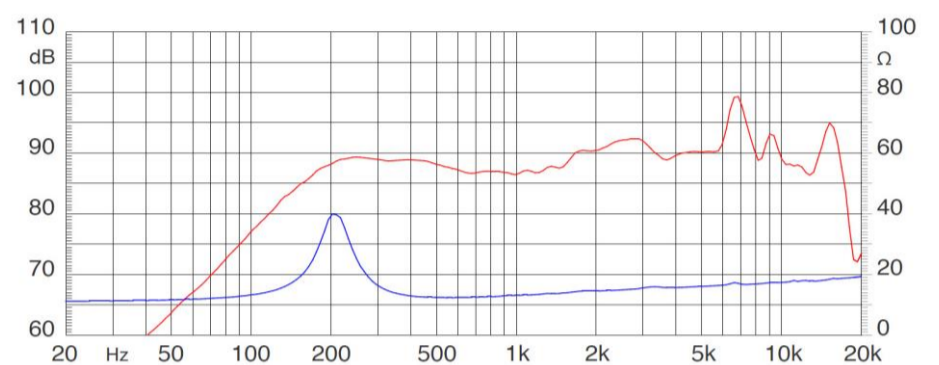

T/S PARAMETERS

16 Ohm

Resonance frequency	Fs	207 Hz
DC Resistance	Re	10,85 Ohm
Mechanical Q Factor	Qms	4
Electrical Q Factor	Qes	1,39
Total Q Factor	Qts	1,03
BI Factor	Bl	6,7 Tm
Effective Moving Mass	Mms	4,37 g
Equivalent Gas air loaded	Vas	0,5 lt (dm ³) - 0,02 cuft
Suspension Compliance	Cms	0,14 mm/N
Effective Piston Diameter	D	81 mm - 3,19 in
Effective piston area	Sd	52 cm ² - 8,06 sq in
Max. Linear Excursion ⁵	Xmax	3 mm - 0,12 in
Voice Coil Inductance @ 1kHz	Le	0,08 mH
Half-space Efficiency	η0	0,29 %

MOUNTING AND SHIPPING INFORMATION

Overall Diameter	102 mm - 4,02 in
Baffle Cutout Diameter	91 mm - 3,58 in
Flange and Gasket Thickness	7 mm - 0,28 in
Total Depth	53 mm - 2,09 in
Bolt Circle Diameter	116 mm - 4,57 in
Bolt Holes Quantity and Diameter	4 / 5,5 mm - 0,22 in
Net Weight	0,84 Kg - 1,85 lb
Shipping Units	12 Pcs

NOTES

¹ Nominal power is determined according to AES2-1984 (r2003) standard.

² Program Power is defined as 3 dB greater than the Nominal rating.

³ Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.

⁴ Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.

⁵ Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.

⁶ Frequency response curve is measured on IEC Baffle.

⁷ Impedance curve is measured in free air conditions at small signals.