

KR AUDIO ELECTRONICS HI VACUUM TUBE

KR T-1610

General data

Filament specifications:	DC/AC Voltage	5 V
	DC/AC Current	3,8 A


Amplification Factor	3,7
----------------------	-----

Maximum

DC Plate Voltage	600 V
Dissipation	150 W
DC Plate Current	240 mA

DC Plate Voltage	400 V
DC Plate Current	160 mA
Grid Voltage	-83 V
Plate Resistance	370 ohm
Transconductance	9,9 mA/V

CONNECTION OF THE VALVE BASE KR T-1610

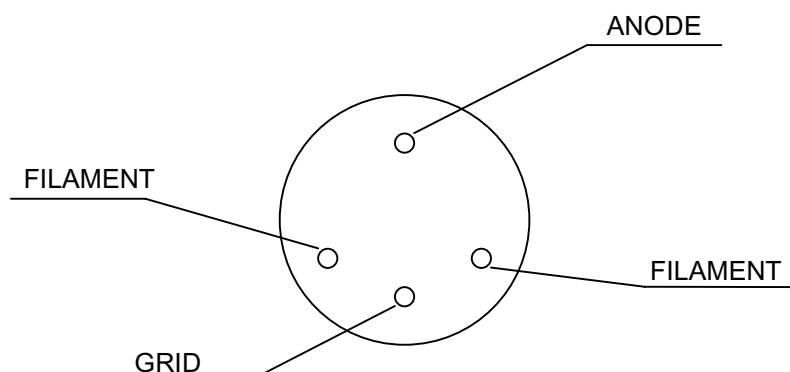

VIEW FROM BELOW

KR AUDIO USA, Harwil Group
Exclusive USA Distributor
8390 E. Via De Ventura
F110-194
Scottsdale, Arizona 85258
1-888-593-8488 x121
www.kraudiousa.com

Plate characteristics KR T-1610

