




# 8" Ceramic Woofer

**Program Power** 450 W Rated impedance 8 Ohm 8"- 200 mm Nominal diameter Sensitivity (2,83V/1m) 96,5 dB Voice coil diameter 2 in - 50 mm Frequency Range 70-5500 Hz


#### **SPECIFICATIONS**


Nominal Diameter		8''- 200 mm
Rated Impedance		8 Ohm
Nominal Power Handling <sup>1</sup>		220 W
Program Power <sup>2</sup>		450 W
Sensitivity <sup>3</sup>		96,5 dB
Frequency Range <sup>4</sup>		70-5500 Hz
Minimum Impedance		-
Basket Material		Aluminum
Magnet Material		Ferrite
Cone Material		Doped cellulose fiber
Cone Shape		Exponential
Surround		Nomex Fabric
Suspension		Cotton fabric
Voice Coil Diameter		2 in - 50 mm
Voice Coil Winding Material		Aluminum
Voice Coil Length		12,7 mm - 0,5 in
Voice Coil Former Material		Aluminum
Connection type		-
Ferrofluid		No
Magnetic Gap Height		8 mm - 0,31 in
Max. Peak to Peak Excursion		-
Efficiency Bandwidth Product EBP		253
Recommended Loading		Vented Box
Volume / Tuning frequency		6 Lt (dm³) - 0,212 cuft / 110 Hz
Maximum recommended frequency		-
Alternative Available Version	8 Ohm	PFXI8.50W
	4 Ohm	CMI200

## FREQUENCY RESPONSE CURVE 6

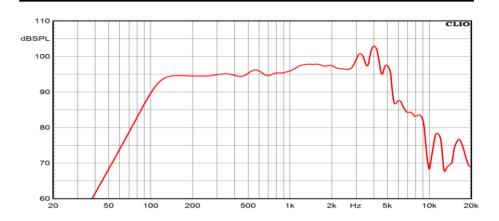

### FREE AIR IMPEDANCE CURVE 7

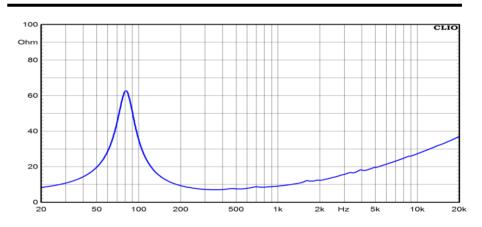



#### T/S PARAMETERS 8 Ohm

Resonance frequency	Fs	81 Hz
DC Resistance	Re	5,7 Ohm
Mechanical Q Factor	Qms	3,4
Electrical Q Factor	Qes	0,32
Total Q Factor	Qts	0,29
Bl Factor	BI	13,3 Tm
Effective Moving Mass	Mms	19,5 g
Equivalent Cas air loaded	Vas	13 lt (dm³) - 0,46 cuft
Suspension Compliance	Cms	-
Effective Piston Diameter	D	165 mm - 6,5 in
Effective piston area	Sd	214 cm <sup>2</sup> - 33,17 sq in
Max. Linear Excursion <sup>5</sup>	Xmax	4,5 mm - 0,18 in
Voice Coil Inductance @ 1kHz	Le	0,7 mH
Half-space Efficency	ŋ0	2,1 %

### MOUNTING AND SHIPPING INFORMATION

Overall Diameter	208 mm - 8,19 in
Baffle Cutout Diameter	185 mm - 7,28 in
Flange and Gasket Thickness	11 mm - 0,43 in
Total Depth	97 mm - 3,82 in
Bolt Circle Diameter	194 mm - 7,64 in
Bolt Holes Quantity and Diameter	4 / 5 mm - 0,2 in
Net Weight	3,15 Kg - 6,94 lb
Shipping Units	1 Pc

### **NOTES**

- <sup>1</sup> Nominal power is determined according to AES2-1984 (r2003) standard.
- <sup>2</sup> Program Power is defined as 3 dB greater than the Nominal rating.
- Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
  Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- $^{5}$  Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.
- <sup>6</sup> Frequency response curve In the range above 150 Hz is measured on infinite baffle conditions and simulated as per recommended loading in the range below 150 Hz.